

NOTES:

1. DESIGN MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
2. HOLES AND INTERFACE DIMENSIONS PER MIL-PRF-83513/2.
3. MATEABLE WITH CONNECTORS MANUFACTURED PER MIL-PRF-83513/1 AND MIL-PRF-83513/3.
4. DESIGNED TO BE LASER WELDED TO AN ALUMINUM HOUSING.
5. HERMETIC LEAK RATE: LESS THAN OR EQUAL TO 1×10^{-9} CC/SEC He AT 1 ATM DIFFERENTIAL PRESSURE.
6. ELECTRICAL REQUIREMENTS:
 - INSULATION RESISTANCE: GREATER THAN 5,000 MEGOHMS AT $500 \pm 10\%$ VDC AT 25°C WHEN TESTED IAW MIL-STD-1344, METHOD 3003.
 - DIELECTRIC WITHSTANDING VOLTAGE: MUST SHOW NO EVIDENCE OF BREAKDOWN OR FLASHOVER WHEN SUBJECTED TO 600 VAC RMS 60Hz IAW MIL-STD-1344, METHOD 3001. DURATION OF APPLICATION TO BE 1 SEC MIN.

7. MATERIALS:


WELD FLANGE: 4XXX SERIES ALUMINUM.
 CONTACTS: BERYLLIUM-COPPER IAW ASTM B196 OR ASTM B197.
 INSULATORS: KRYOFLEX 313 PROPRIETARY POLYCRYSTALLINE CERAMIC.
 INTERFACIAL SEAL: FLUOROSILICONE RUBBER IAW MIL-R-25988, CLASS I, TYPE II, GRADE 60.
 HELICAL INSERTS: 300-SERIES STAINLESS STEEL.

8. FINISH:



CONTACTS: ELECTROLYTIC NICKEL PLATE IAW QQ-N-290, .000100/.000250 THICK.
 GOLD PLATE IAW ASTM B488, TYPE II, CODE C OR MIL-G-45204, TYPE II, GRADE C, .000050/.000150 THICK.
 SHELL: CHEMICAL CONVERSION COAT IAW MIL-C-5541, CLASS IA.

9. ORDERING INFORMATION:





PLEASE SPECIFY ACCORDING TO THE FOLLOWING

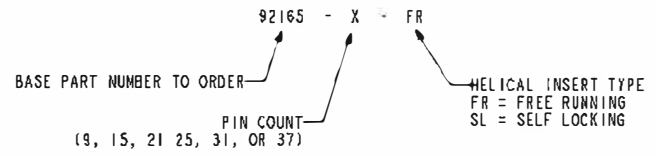

NUMBER OF CONTACTS	W	Y	Z
9	.792	.422	.795
15	.942	.572	.945
21	1.092	.722	1.095
25	1.192	.822	1.195
31	1.342	.972	1.345
37	1.492	1.122	1.495

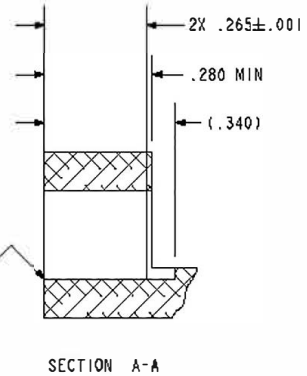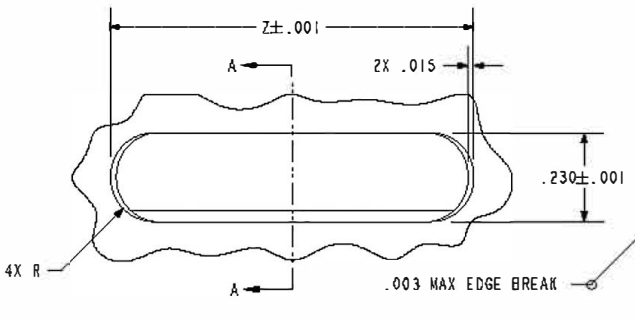

RECOMMENDED HOLE DETAIL

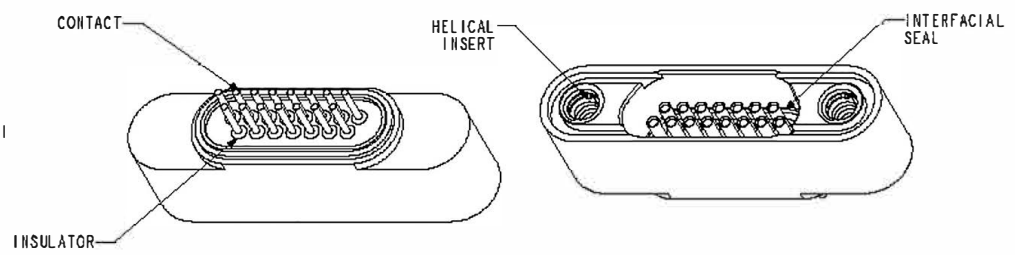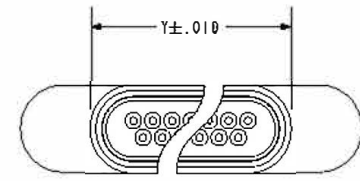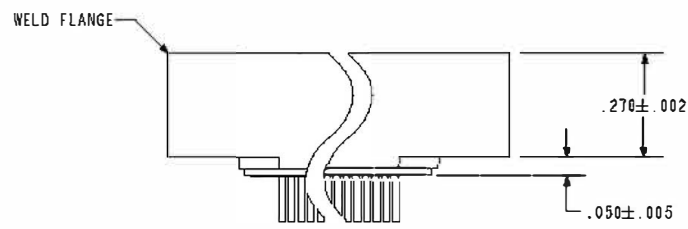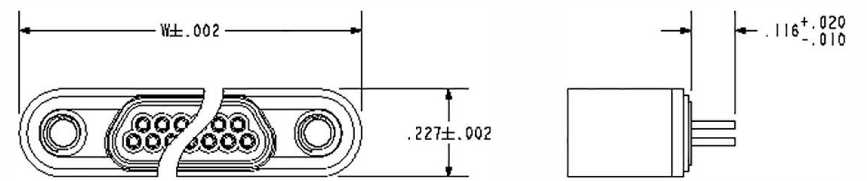

VERSION: H.3
 RELEASE DATE: 01-13-11

A Division of HERMETIC SOLUTIONS
Enabling Technology

434 Olds Station Rd. Wenatchee WA 98801
WWW.PACAERO.COM

TITLE: CONNECTOR, MICRO-D, LOW-PROFILE, AL-COMPATIBLE		THIRD ANGLE PROJECTION	
CAGE CODE: 64567		DRAWING: 0-92165	
SHEET: 1 OF 1		DOCUMENT: 0-92165	